



A7800P

THERMAXX ADVANTAGE

THE ADVANTAGE IS TO YOUR BOTTOM LINE

Temperature Capacity
-20°C

Cubic Capacity
45.11 m³

BODY DIMENSION			
External length	7800mm	Side door	Passenger side pallet door 2450 x 1400mm
External width	2490mm	Rear door	Double - (left opens first)
External height	2650mm	Front wall frame	Universal to suit diesel drive units
Internal length	7640mm	Side step	Fixed rung step
Internal width	2410mm	Rear step	Heavy duty crash bar
Internal height	2450mm	Cargo track	2 recessed row @ 800-1400mm 2 shoring bars
Pallet loading	12 Pallet capacity	Floor	One piece aluminium ricegrain
Fitted body weight		Internal light	2 LED sensor light
PANELS THICKNESS		Refrigeration	Thermo King T-1000R
Roof/floor	100mm		
Front wall	100mm		
Side walls/side doors	40mm		
Rear doors	60mm		




Thermal efficiency 'K' VALUE .57 W/m²K tested to Australian Standard AS4982

Standard Inclusions

- High density polyurethane insulation
- European design
- European construction
- Low tare weight
- Higher legal payload
- Galvanised sub frame
- Recessed stainless door hardware
- Stainless door frames
- Anodised corner mouldings
- Long life EPDM rubber seals
- Internal LED sensor lights
- Rubber bump stops

Model No: A7800-BDEHI

- Rear/side grab handles
- Recessed load restraint track
- Moulded plastic mud guards
- Alloy kick panel
- Options available to suit customer requirements

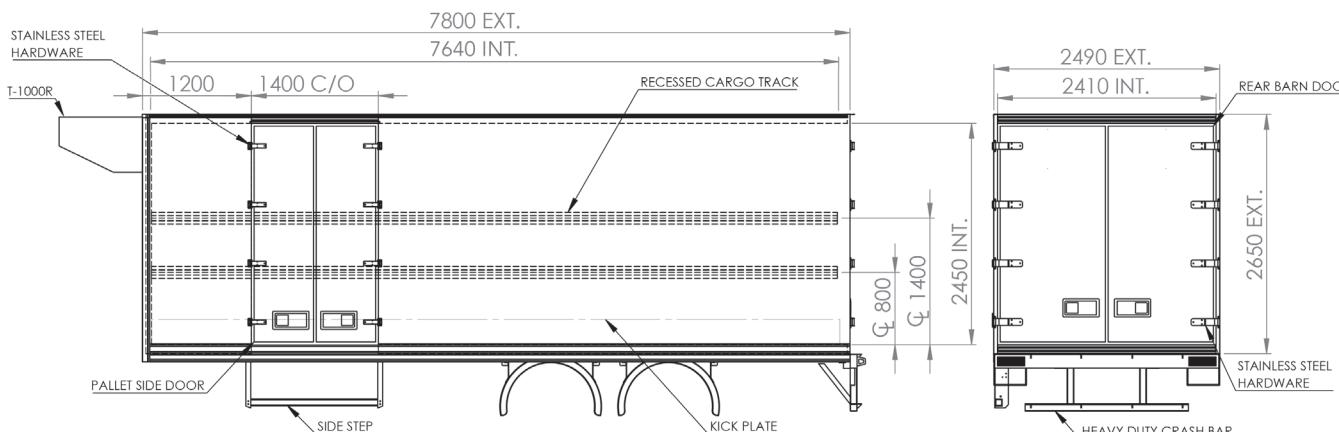

STE/TRS/Thermaxx mission is one of continuous improvement, we reserve the right to change without notice or obligation to modify the technical specifications and aesthetic characteristics of the Thermaxx product. Please note: STE/TRS/Thermaxx provides the information contained herein in good faith and changes may have been made to the product since this brochure went to print (01.01.2023). *Fitted body weight is an approximate weight based on the standard products supplied. Note: final weight may vary based on the type of cab chassis used, and/or extra body equipment added. The 4 year warranty is for the Thermaxx Advantage products only.