



MODEL: **A7850P**

THERMAXX ADVANTAGE

THE ADVANTAGE IS TO YOUR BOTTOM LINE

Temperature Capacity
-20°C

Cubic Capacity
47.32m³

BODY DIMENSION		Side door	N/A
External length	7850mm	Rear door	65mm freezer rated roller shutter door with galvanised frame
External width	2490mm	Front wall frame	Universal to suit diesel drive units
External height	2650mm	Side step	N/A
Internal length	7620mm	Rear step	Heavy duty crash bar
Internal width	2410mm	Cargo track	2 recessed row @ 800-1400mm 2 shoring bars
Internal height	2450mm	Floor	One piece aluminium ricegrain
Pallet loading	12 Pallet capacity	Internal light	3 LED sensor light
Fitted body weight	*3218kg	Refrigeration	Thermo King T-1000R
PANELS THICKNESS			
Roof/floor	100mm		
Front wall	100mm		
Side walls/side doors	40mm		




Thermal efficiency 'K' VALUE .64 W/m²K tested to Australian Standard AS4982

Standard Inclusions

- High density polyurethane insulation
- European design
- European construction
- Low tare weight
- Higher legal payload
- Galvanised sub frame
- Stainless door frames
- Anodised corner mouldings
- Long life EPDM rubber seals on roller door
- Internal LED sensor lights
- Rubber bump stops
- Rear/side grab handles
- Recessed load restraint track
- Moulded plastic mud guards
- Alloy kick panel
- Options available to suit customer requirements
- Heavy duty galvanised rear door frame

Model No: A7850P-EHO

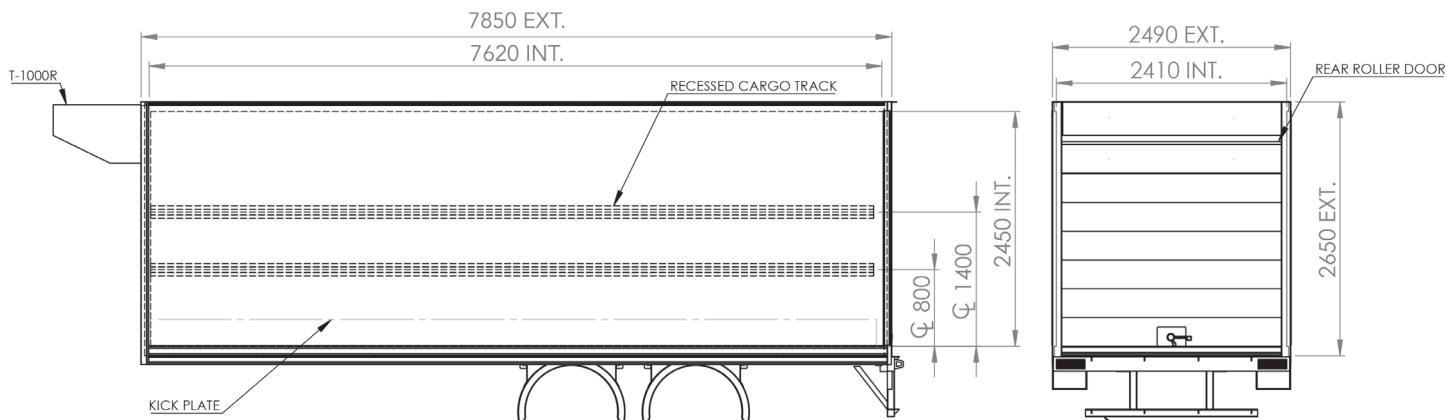

STE/TRS/Thermamaxx mission is one of continuous improvement, we reserve the right to change without notice or obligation to modify the technical specifications and aesthetic characteristics of the Thermamaxx product. Please note: STE/TRS/Thermamaxx provides the information contained herein in good faith and changes may have been made to the product since this brochure went to print (01.01.2023). *Fitted body weight is an approximate weight based on the standard products supplied. Note: final weight may vary based on the type of cab chassis used, and/or extra body equipment added. The 4 year warranty is for the Thermamaxx Advantage products only.