



MODEL: **A4060N**

THERMAXX ADVANTAGE

THE ADVANTAGE IS TO YOUR BOTTOM LINE

Temperature Capacity
-20°C

Cubic Capacity
14.18m³

BODY DIMENSION

External length **4060mm**
External width **2180mm**
External height **2000mm**

Internal length **3900mm**
Internal width **2020mm**
Internal height **1800mm**

Pallet loading **3 Pallet capacity**

Fitted body weight

***1177kg**

PANELS THICKNESS

Roof/floor **100mm**
Front/side wall **80mm**
Rear/side doors **80mm**

Side door

Passenger side single door
1450 x 650mm

Rear door

Double - (left opens first)

Front wall frame

Universal to suit off engine
drive units

Side step

Fixed rung step

Rear step

Fixed plank step

Cargo track

1 recessed row @ 800mm
1 shoring bar

Floor

Fibreglass non-slip

Internal light

2 LED sensor light

Refrigeration

Thermo King SV400





Thermal efficiency 'K' VALUE .34 W/m²K tested to Australian Standard AS4982

Standard Inclusions

- High density polyurethane insulation
- European design
- European construction
- Low tare weight
- Higher legal payload
- Galvanised sub frame
- Recessed stainless door hardware
- Stainless door frames
- Anodised corner mouldings
- Long life EPDM rubber seals
- Internal LED sensor lights
- Rubber bump stops
- Rear/side grab handles
- Recessed load restraint track
- Moulded plastic mud guards
- Options available to suit customer requirements

Model No: A4060N - BCFHI

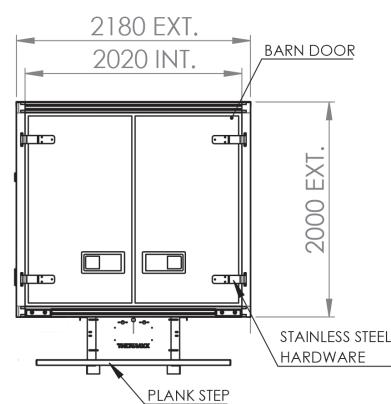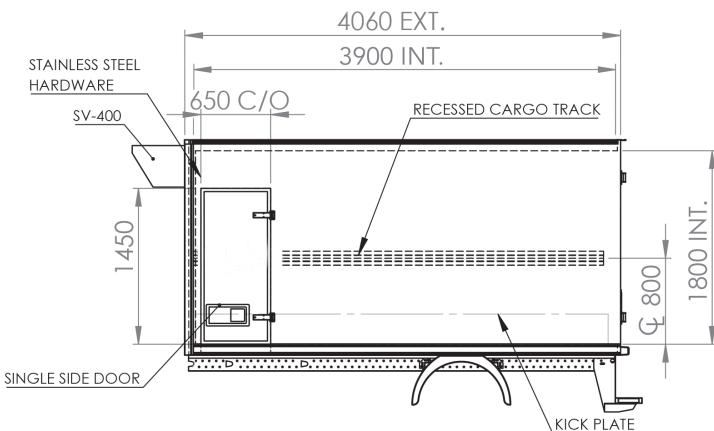

STE/TRS/Thermamaxx mission is one of continuous improvement, we reserve the right to change without notice or obligation to modify the technical specifications and aesthetic characteristics of the Thermamaxx product. Please note: STE/TRS/Thermamaxx provides the information contained herein in good faith and changes may have been made to the product since this brochure went to print (01.01.2023). *Fitted body weight is an approximate weight based on the standard products supplied. Note: final weight may vary based on the type of cab chassis used, and/or extra body equipment added. The 4 year warranty is for the Thermamaxx Advantage products only.