



MODEL: **A6500P**

THERMAXX ADVANTAGE

THE ADVANTAGE IS TO YOUR BOTTOM LINE

Temperature Capacity
-20°C

Cubic Capacity
33.51m³

BODY DIMENSION			
External length	6500mm		
External width	2490mm		
External height	2400mm		
Internal length	6320mm		
Internal width	2410mm		
Internal height	2200mm		
Pallet loading	10 Pallet capacity		
Fitted body weight		*2405kg	
PANELS THICKNESS			
Roof/floor	100mm		
Front wall	100mm		
Side walls/side doors	40mm		
Rear doors	80mm		
Side door	Passenger side pallet door 2200 x 1400mm		
Rear door	Double - (left opens first)		
Front wall frame	Universal to suit diesel drive units		
Side step	Fixed rung step		
Rear step	Flush crash bar		
Cargo track	1 recessed row @ 1000mm 1 shoring bar		
Floor	One piece aluminium ricegrain		
Internal light	2 LED sensor light		
Refrigeration	Thermo King T-1000R		





Thermal efficiency 'K' VALUE .57 W/m²K tested to Australian Standard AS4982

Standard Inclusions

- High density polyurethane insulation
- European design
- European construction
- Low tare weight
- Higher legal payload
- Galvanised sub frame
- Recessed stainless door hardware
- Stainless door frames
- Anodised corner mouldings
- Long life EPDM rubber seals
- Internal LED sensor lights
- Rubber bump stops
- Rear/side grab handles
- Recessed load restraint track
- Moulded plastic mud guards
- Alloy kick panel
- Options available to suit customer requirements

Model No: A6500P - BDEHI

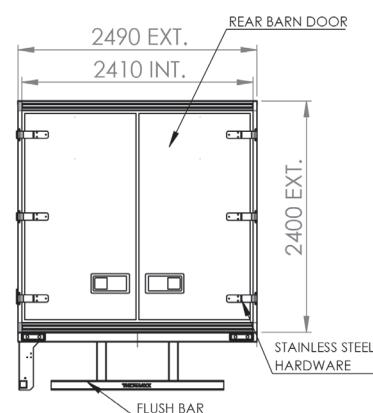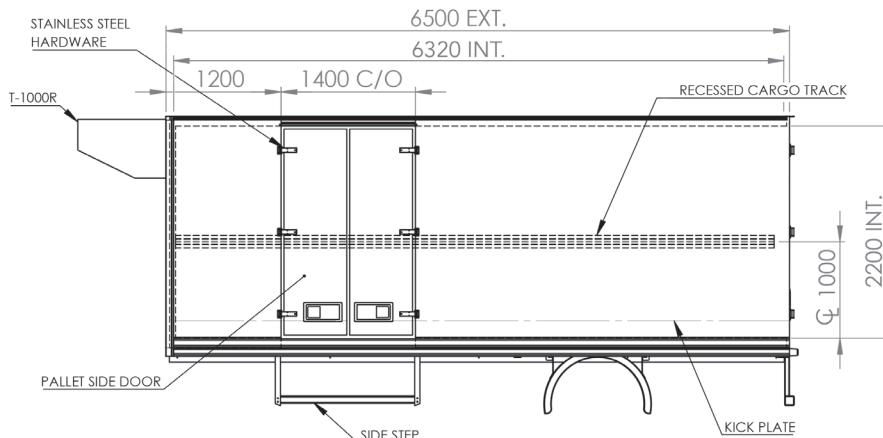

STE/TRS/Thermamaxx mission is one of continuous improvement, we reserve the right to change without notice or obligation to modify the technical specifications and aesthetic characteristics of the Thermamaxx product. Please note: STE/TRS/Thermamaxx provides the information contained herein in good faith and changes may have been made to the product since this brochure went to print (01.01.2023). *Fitted body weight is an approximate weight based on the standard products supplied. Note: final weight may vary based on the type of cab chassis used, and/or extra body equipment added. The 4 year warranty is for the Thermamaxx Advantage products only.